


# Procedure for Replacing the Cap Head Assemblies (OPT-J0138/A102167)



■ When cleaning the ink station or heads, be sure to wear the goggles and gloves supplied with this printer. If you do not use the goggles, you may get ink in your eyes.

## ■ Items in the package



Cap head assembly  
1 assembly



Gloves...1 pair



CAP Stopper  
1 assembly



Tubes...2

## ■ Necessary tools

Phillips Screwdriver
Adhesive tape


## ■ Steps for replacement

- 1 Make sure that the printer is in LOCAL mode.  
If it is in REMOTE mode, press the [REMOTE] key.

< LOCAL. 1 > [#01]  
width : \*\*\*\* mm


- 2 Press the [ST.MAINT] key and press the [ENTER] key.

When [CARRIAGE OUT] is displayed, press the [ENTER] key. Then the carriage moves to above the platen.




- 3 Turn off the main power switch (at the right side of the printer body).

- 4 Remove the right maintenance cover.

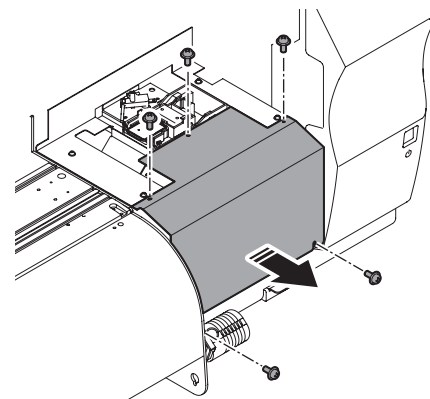

- 5 Remove the tube of H-shape joint from the cap.

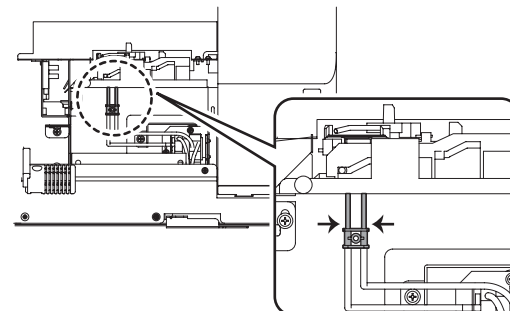


- 6 Slide the cap head assembly in the lateral direction while pushing down the cap, and remove the cap head assembly from the cap base.



■ Remove the cap head assembly in the direction of the arrow while pushing down the cap.


Put the cleaning nozzle with adhesive tape.

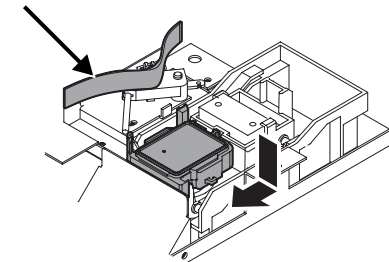

- 7 Install tubes and CAP Stopper on the new cap head assembly.

(Important!)


■ Take care not to install the CAP stopper into a wrong hole.  
■ Insert tubes all the way in.



- 8 Slide the new cap head assembly in the lateral direction while pushing down the cap the same as when removing the old one, and set the cap head assembly in its position on the cap base.

(Important!)

■ Take care not to scratch the sealing surface of the cap.

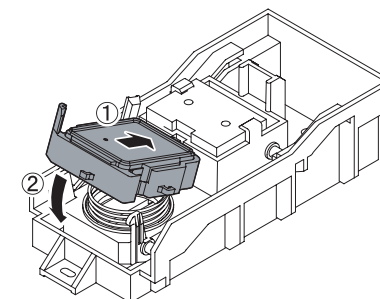


- 9 Connect H-shape joint and the tube removed at step 5 to the cap.

(Important!)

■ Insert the tube all the way in.

- 10 Remove the white protection plate from the top of the cap head assembly.



- 11 Remove the tape from the cleaning nozzle.

- 12 Install the right maintenance cover.


- 13 Turn on the main power switch (at the right side of the printer body).

# キャップヘッドアセンブリの交換方法 (OPT-J0138/A102167)



■必ず装置本体に付属のゴーグルと手袋を着用して作業を行ってください。インクが目に入る場合があります。

## 梱包部品



キャップヘッドアセンブリ x1



手袋 x1



キャップ止め栓 x1



チューブ x2

## 必要な工具

プラスドライバー  
粘着テープ

## 交換手順


1 ローカルモードになっていることを確認します。

リモートモード時は【REMOTE】キーを押します。

<ローカル.1> [#01]  
ハバ: \*\*\*\* mm


2 【ST.MAINT】キーを押し、【ENTER】キーを押します。

[ キャリッジアウト ] を表示後、【ENTER】キーを押すことで、キャリッジがプラテン上に移動します。




3 キャリッジアウト後、主電源（機体右側）をオフにします。

4 右側のメンテナンスカバーを開けます。

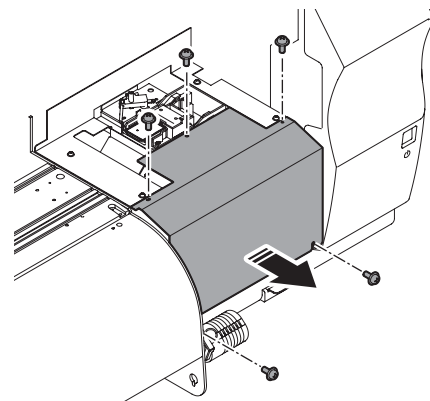

5 キャップからH型継手部のチューブを外します。

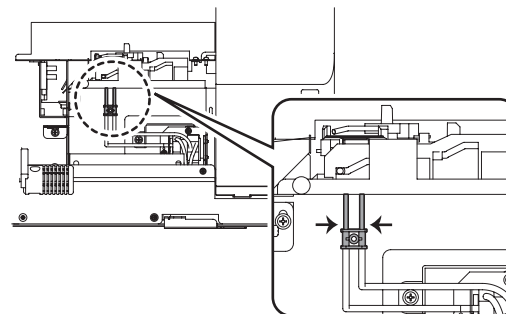


6 キャップを押し込みながら横方向にスライドさせて、キャップヘッドアセンブリをキャップベースから外します。



■矢印方向に、キャップを押し下げて外します。

洗浄ノズルをテープ止め

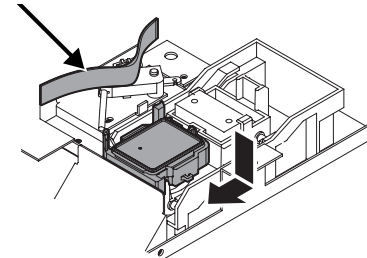


7 新しいキャップヘッドアセンブリにチューブ、止め栓を取り付けます。

(重要!)

■キャップ止め栓を取付ける際、塞ぐ穴を間違えないように注意してください。


■チューブは根元まで挿し込んでください。



8 新しいキャップを、キャップを外す時と同じ要領で、キャップ上部から押し下げながら横方向にスライドさせ、キャップベースに引っ掛けてください。

(重要!)

■キャップのシール面に、キズを付けないよう注意してください。

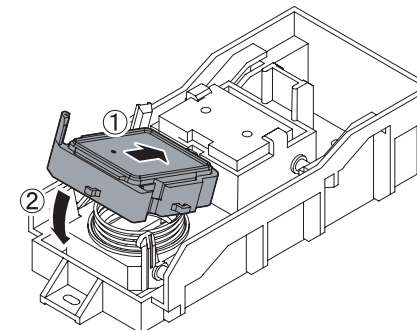


9 手順5で外したH型継手とチューブを接続してください。

(重要!)

■チューブは根元まで挿し込んでください。

10 キャップアセンブリ上部の、白い保護板を外します。



11 洗浄ノズルを止めたテープを外します。

12 右側のメンテナンスカバーを取り付けます。

13 主電源（機体右側）を入れます。